
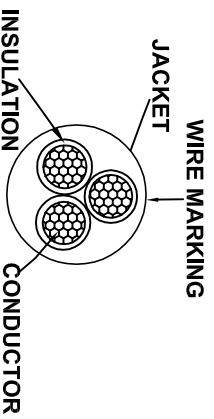
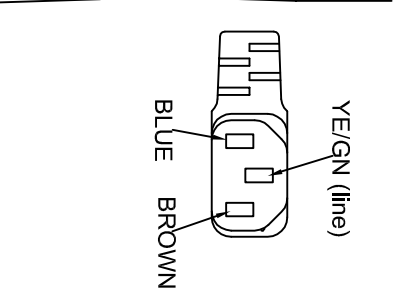
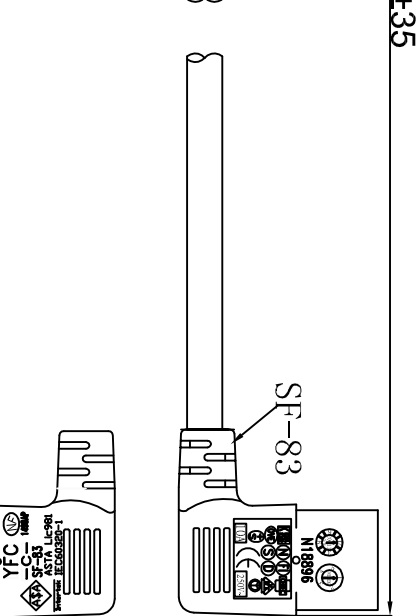
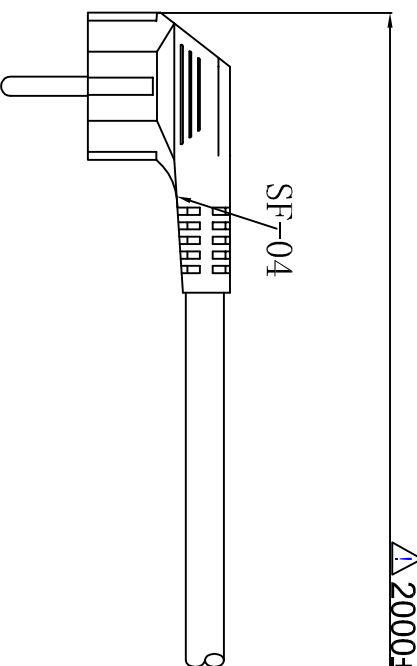


ROHS COMPLIANT

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			

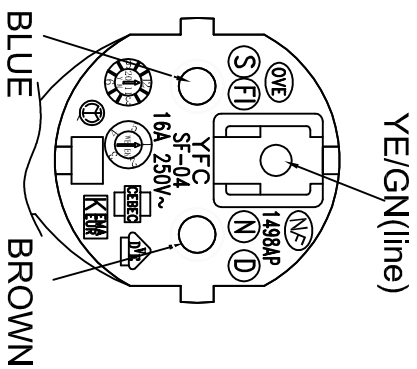

**WIRE MARKING:** + O + O + O KEMA-KEUR (OVE) (S) (N) (D) (F) Δ CEBEC 972 <VDE> NF-USE 1345 (Hollow) IEMMECU H05VV-F 3G 0.75MM<sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE

Conductor 導體		Insulation 絕緣體		Jacket 被覆體		Overall diameter 完成外徑
mm <sup>2</sup> Resistance maximum 最大電阻(≤)	Min. Thickness 最小厚度	Diameter 絕緣外徑	Length of Lay 芯絞	Min. Thickness 最小厚度	Avg. Thickness 平均厚度	
0.75 (24/0.19)	0.44mm	2.4±0.1mm	130 ↓ mm	0.58mm	0.8mm	6.8±0.1mm

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

- ELECTRIC TESTING:**
1. 100% OPEN & SHORT TESTING.
  2. VOLTAGE RATING: AC ≥2000V/S
  3. PLUG(SF-04) RATED POWER: 250V 10/16A
  4. PLUG(SF-83) RATED POWER: 250V 10A
  5. WIRE: H05VV-F 3X0.75 RATED VOLTAGE: 300/500V
  6. COLOR: BLACK

PAGE	1/1	<h1>2D Direct GmbH</h1>							
重點尺寸									
Unless specified on the drawing, tolerances are per the follows:									
X ±1									
.XX ±0.05		DESCRIPTION	H05VV-F 3X0.75 SF-04+SF-83	CUSTOMER NAME	2D Direct	SAMPLE NO.		DATE	
3RD		CUSTOMER PART NO.		DRAW		DHY		DATE	2012/02/16
		SCALE		CHECK		WUXIAO		DATE	2012/02/16
		UNIT	MM	APPROVAL				DATE	
		PATH NAME	//DI//業務						